


40' LED LIGHT TOWERS

DESCRIPTION

The 12m (40') skid mounted LED Light Tower has been developed to provide a brighter & larger work area with its 3X brighter cool white luminescent LED array. The wind load engineered swing out outriggers provide stable lighting in the most severe weather conditions



LED LIGHT TOWER DIFFERENCE

- 12m (40') vs. the regular 10m (23') standard towers
- The LED light tower provides up to 3X more luminance in a cool white light vs. the standard yellow light

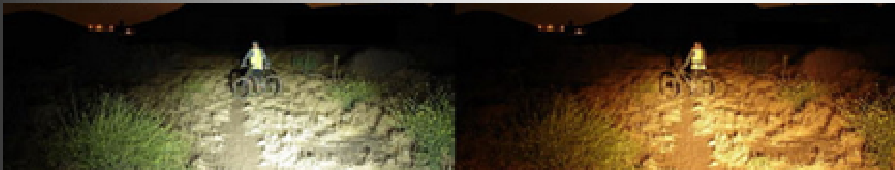

LED LIGHT TOWER DIFFERENCE (cont.)

- Battery back-up (min 2-1/2 to a max 5 hrs on battery), vs. the standard straight generator
- Lower power consumption
- 8 LED light towers can be loaded onto a flat bed trailer for transport

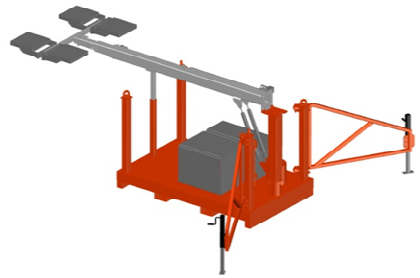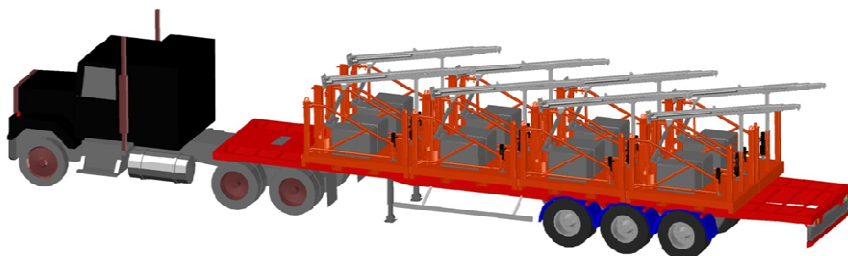

LED LIGHT TOWER

- 12m (40') tower provides less shadowed areas around equipment
- Daisy chain capable (connect up to 3 units up to 135m (450') in a row off one power source)
- No fueling of each individual light tower
- 70,000 hr lifespan on bulbs
- LED Light Tower mast turns 360°
- Powered hydraulic tilt & telescoping tower mast for safety
- Forklift pockets & picker lifting lugs for positioning
- AC/DC powered hydraulic tilt & Telescopic mast
- Rig in or rig out and transport can be completed either by using a bed truck, lift truck or a picker unit
- Dimensions — 2.4m(8')L x 1.5m(5')W x 2.0m(6'6") min to 12.2m(40') max(H)

MOVABLE WELLHEAD PLATFORM



DESCRIPTION

The Cantilever Movable Wellhead Platform has been developed to provide a safe & stable working environment with its overhead fall arrest tie off points, multi level decks that are infinitely adjustable & stairs that are self leveling to ensure horizontal steps regardless of platform heights.

FEATURES


Design Cantilever Movable Wellhead Working Platform difference

- Safe, Stable & Ergonomic
- Quick rig in, rig out times
- Multi level work stations
- Main platform Hydraulically elevates from 1.5m (5') up to 4.9m(16') (auxiliary deck to 6.1m(20'))
- Platform can be quickly raised or lower to obtain optimum work height position
- Powered screw system to roll platform over or away from wellhead

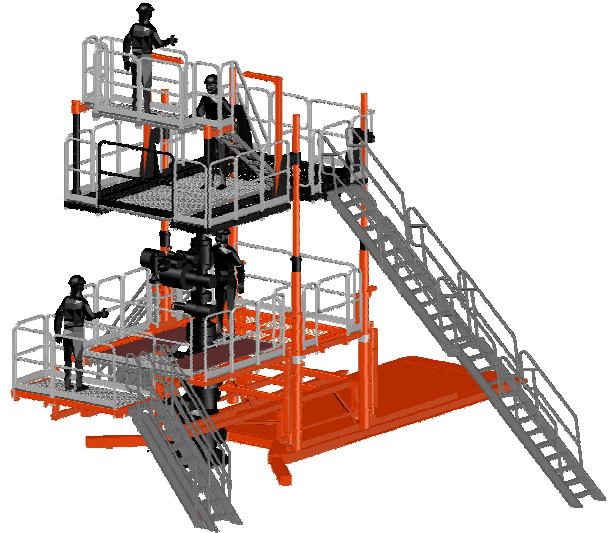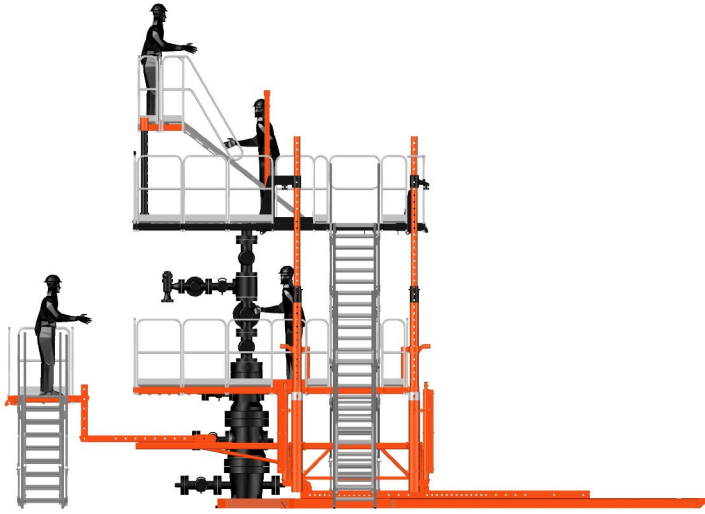

Cantilever Movable Wellhead Platform Advantages

- Non-restrictive area at base of wellhead
- The angled dropdown outriggers eliminate the need to shore across the wellhead cellar
- 4 adjustable working decks with handrails
- Overhead fall arrest to service 3 of the working decks
- Secondary egress system
- Main structure can be easily rolled back away from wellheads giving an obstruction free area around the wellhead
- Optional winter tarp Available
- Versatile setup and quick & compact rig out
- Simple/safe excellent for wellhead work, completions/workovers
- Adjustable floor panels to surround wellhead
- Narrow removable handrail sections on main deck to minimize fall hazard/exposure
- Complete system engineered for structural & wind loading
- System has been manufactured to all OH&S & BC Work Safe standards
- Complete working manual for safe & simple operations

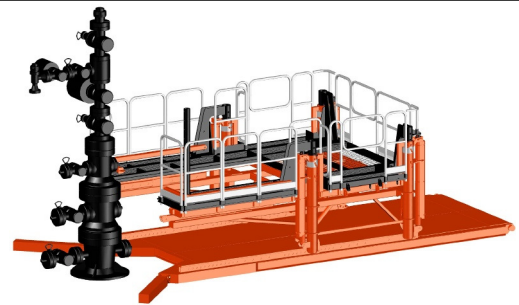

General specifications:

Telescopic stairs, ladders & removable platforms & decking are of aluminum construction for easy handling

Rig in or rig out and transport can be completed either by using a bed truck or a picker unit

Dimensions - 6.7m(22')L x 2.9m(9'6") W x 2.3m(7'6") min to 6.1m(20') max(H)

- Patented design

COMPACT MOBILE PLATFORM

DESCRIPTION:

The compact mobile platform can be manually positioned over wellhead & was designed for ergonomic wellhead access when performing workovers or completion duties



SPECIFICATIONS:

- Transportation Dimensions:
 - 3.5m(140")L x 2.5m(100")W x 3.3m (130")H
 - Deck heights 0.6m(24") min. to 4.3m (170") max.
- Weight:
 - 2950kg (6500lbs.)

FEATURES

The platform can easily be:

- Transported via 3 ton truck
- Loaded & unloaded without additional equipment
- Rolled up to & around the wellhead with its light-weight design
- Adjusted to surround the wellhead with its removable decking sections
- Hydraulically adjusted to multiple heights
- Can be disassembled for compact storage
- Durable — Powder coat finish
- Removable handrails sections
- Removable deck sections

CUSTOM MOULDING

CONTACT INFORMATION

Canada Contacts

RIDE International

5524 - 53 Avenue
PO Box 6213
Drayton Valley, Alberta
Canada T7A 1S4

phone: 780-621-1570
fax: 780-621-1531

Paul Smith
President
780-621-7424

Joe Hak
International Sales
587-991-7433

Darrel Boulter
Marketing & Sales
780-542-0258

Greg Hartman
Sales
780-898-6425

International Contacts

Middle East GCC

Sultanate of Oman
Suite #42, Al Harthy Complex
Qurum, Muscat, Sultanate of Oman
PO Box 167 P.C. 116, Mina al Fahal

phone: 968-24560156
fax: 968-24562844

Juma Ali
Managing Director

Shamsheer Ahmed
Engineering & Business Development